




Bon-Brite

Bonnet & Traffic Lane Cleaner

Limpiador

- Highly Concentrated • Fast Drying
- Removes All Kinds of Soils • Cleans Quickly

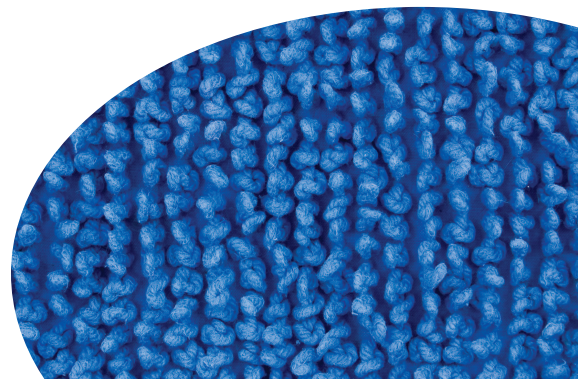

Technical Data Sheet

PRODUCT DESCRIPTION:

A highly concentrated blend of optical brighteners, surfactants and polar solvents formulated as a low residue, fast drying carpet surface cleaner.

USES:

Use as a cleaner with a bonnet system on carpet traffic lanes.

ADVANTAGES:

Excellent cleaning action that can be applied using a bucket and wringer method or a spray method. Quick drying. Areas can be opened to traffic quickly. Non-foaming.

SPECIFICATIONS:

Active Ingredients: 10%
pH: 8
Color: Clear
Solubility in Water: Complete
Odor: Lemon
Flash Point: None
Viscosity: Water Thin
Weight per Gallon: 8.3 Lbs.

PRODUCT/CONTAINER DISPOSAL:

Dispose of used/unwanted product according to state and local regulations. Offer container for recycling.

SIZES AVAILABLE:

1 Gallon Bottle, 5 Gallon Pail,
30 & 55 Gallon Drums.



Recyclable packaging

PRODUCT USE

PRODUCT USE	DILUTION RATE
Bucket/Wringer-Light Duty	6 oz. per gallon of water
Bucket/Wringer-Heavy Duty	10 oz. per gallon of water
Pressurized Sprayer	10 oz. per gallon of water

DIRECTIONS FOR PRODUCT USE:

BUCKET & WRINGER METHOD:

1. Pre-test carpet for colorfastness in an inconspicuous area at recommended use dilution. Use clean cloth or sponge for application & if test area indicates bleeding, color removal, carpet shrinkage or deterioration of adhesive, do not use.
2. Soak the bonnet in the solution and wring out as dry as possible.
3. Place bonnet under a low speed floor machine (usually 175 RPM) equipped with a pad holder.
4. Clean a 4' x 4' section at a time, overlapping sections.
5. When one side of the bonnet becomes laden with soil, reverse and continue.
6. When finished, thoroughly rinse out pad, wring out as dry as possible, and allow the bonnet to dry.
7. Traffic may resume as soon as the carpet is dry, usually in about 30 minutes.
8. For large areas, the double bucket method is normally used to quicken the cleaning process:


One bucket will contain the diluted solution while the other will contain clear water. One bonnet is soaked in the cleaner and wrung out as dry as possible. Start cleaning as described above. Meanwhile, soak a second bonnet in the diluted solution. When the bonnet is completely soiled on both sides, place the bonnet in the clear rinse water bucket. Wring out the second bonnet and place under the machine. Rinse out the first bonnet, wring out as dry as possible and place in the diluted solution bucket. Continue cleaning the carpet with the second bonnet. Proceed in this manner.

PRESSURIZED SPRAYER METHOD:

1. Spray the bonnet with the solution until all areas are wet. Place bonnet under a low speed floor machine.
2. Spray the area to be cleaner with the diluted solution, 4' x 4' sections at a time.
3. When the bonnet becomes soiled, reverse the bonnet and spray the new surface.
4. When the bonnet is completely soiled, repeat the procedure with a new bonnet or thoroughly wash out the soiled bonnet and wring out until it is just damp. Proceed as stated above.



It is recommended that protective gloves and safety glasses be worn when using this and all cleaning products.
Refer to SDS for further safety information.

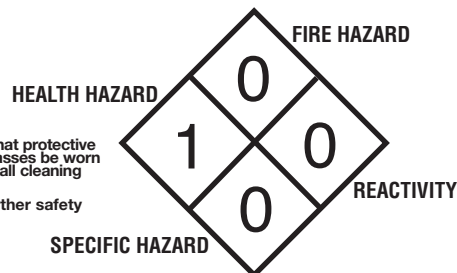

MANUFACTURED BY:



AMERICAN Cleaning Solutions
Division of American Wax Company, Inc.

39-30 Review Avenue
Long Island City, New York 11101
1-888 WAX PLUS • (718) 392-8080 Fax: (718) 482-9366
Visit us on the web! www.cleaning-solutions.com

